

---

# An Overview of the Fluid Dynamics Aspects of Liquid Protection Schemes for Fusion Reactors

**S. I. Abdel-Khalik and M. Yoda**

*TOFE-16 Meeting - Madison (September 2004)*



**G. W. Woodruff School of  
Mechanical Engineering  
Atlanta, GA 30332-0405 USA**

---

# OUTLINE


- **Thick Liquid Protection (HYLIFE-II)**
- **Thin Liquid Protection (Prometheus)**
  - Wetted Wall Concept
  - Forced Liquid Film Concept
- **Liquid-Surface-Protected PFCs**



# Thick Liquid Protection

**HYLIFE-II: Use slab jets or liquid sheets to shield IFE chamber first walls from neutrons, X-rays and charged particles.**

- Oscillating sheets create protective pocket to shield chamber side walls
- Lattice of stationary sheets (or cylindrical jets) shield front/back walls while allowing beam propagation and target injection

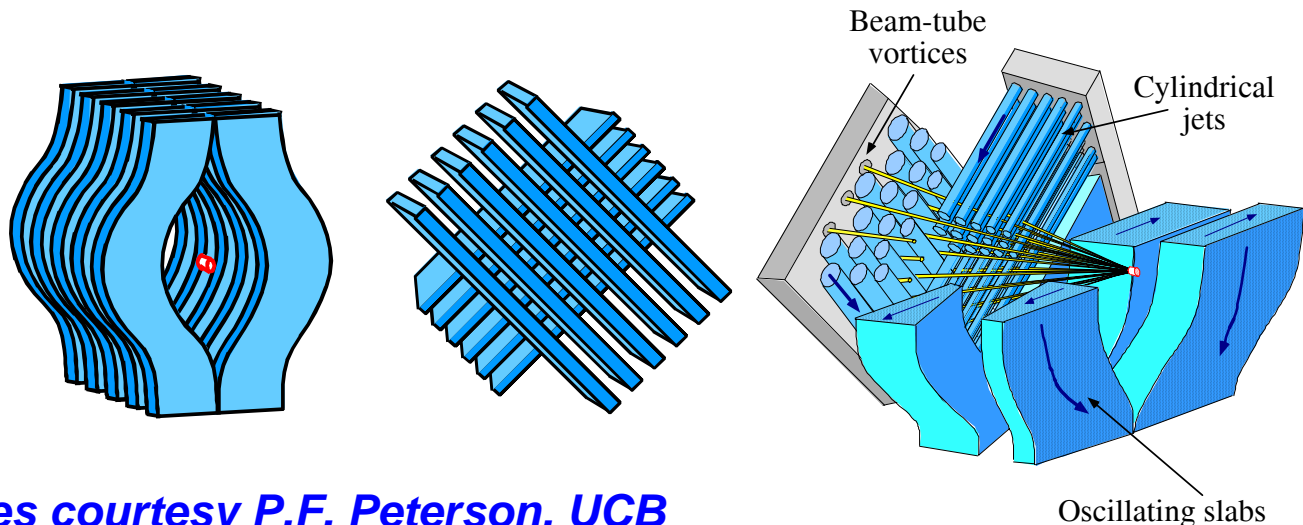

*Pictures courtesy P.F. Peterson, UCB*





# Thick Liquid Protection

## Problems Addressed:

- Is it possible to create “smooth” prototypical turbulent liquid sheets to allow beam propagation through the lattice?
  - Small (~5 mm) clearance between driver beam & sheet free surface in protective lattice  $\Rightarrow$  > 30 year lifetime for final focus magnets
- How much “fog” is created in the chamber?
  - Primary turbulent breakup – the “hydrodynamic source term”
  - Limits dictated by beam propagation and target delivery requirements






# Surface Smoothness

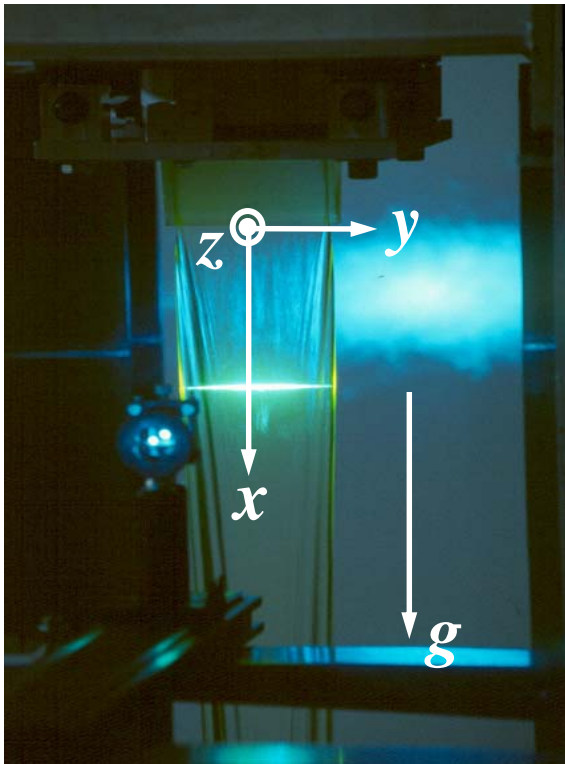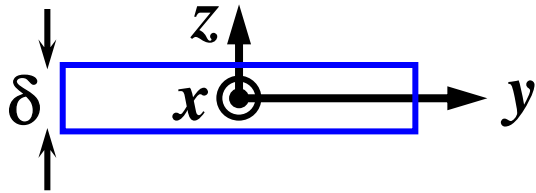


- Used Planar Laser Induced Fluorescence (PLIF) to characterize the jet free surface at near prototypical conditions
- Examine effects of nozzle design, flow conditioning, and boundary layer cutting on surface ripple
- Measure standard deviation of free surface  $z$ -location ( $\sigma_z$ )
  - Characteristic length scale  $\delta = 1$  cm
  - $Re = U_o \delta / \nu \leq 130,000$
  - $We = \rho_L U_o^2 \delta / \sigma \leq 19,000$
  - Near field  $x / \delta \leq 25$
  - Boundary layer cutter removal rate  $\dot{m}_{cut} / \dot{m}_{flow} = 0.0 - 1.9\%$



# Flow Conditioning and Boundary Layer Cutting

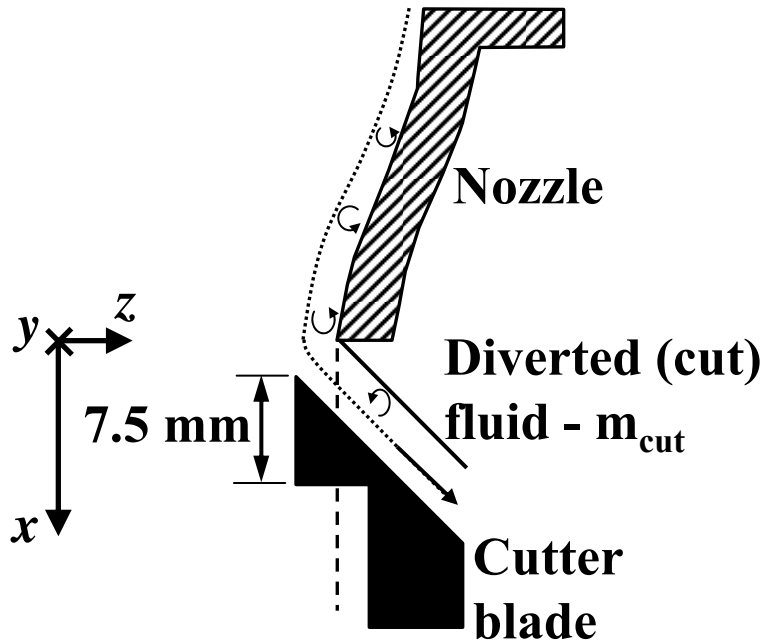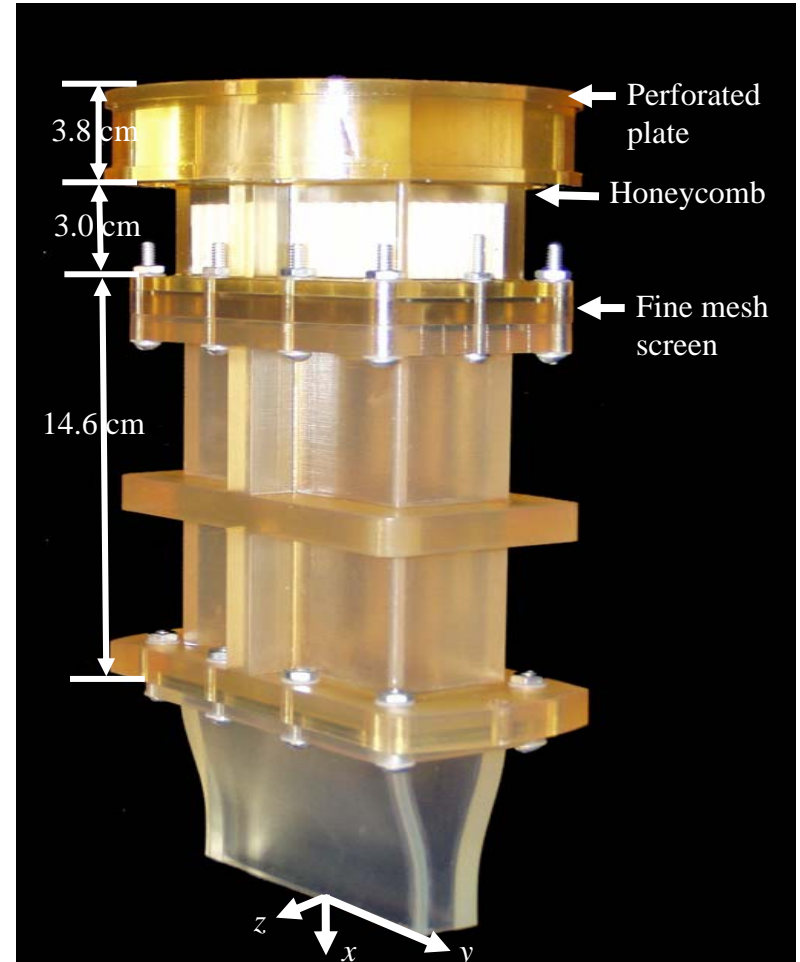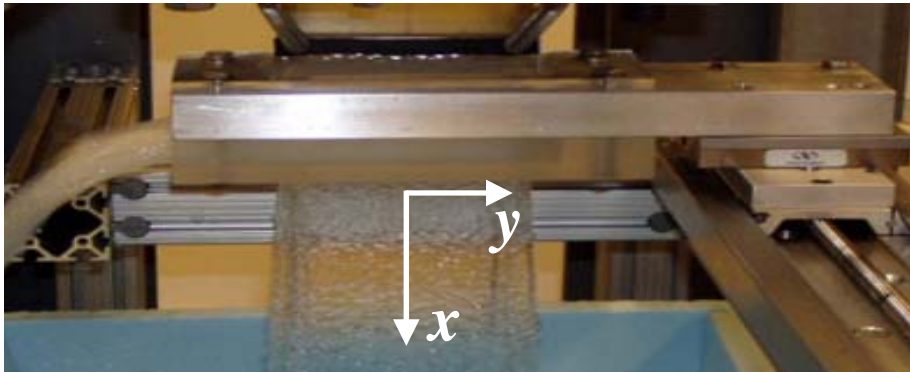

# Surface Smoothness (PLIF Results)


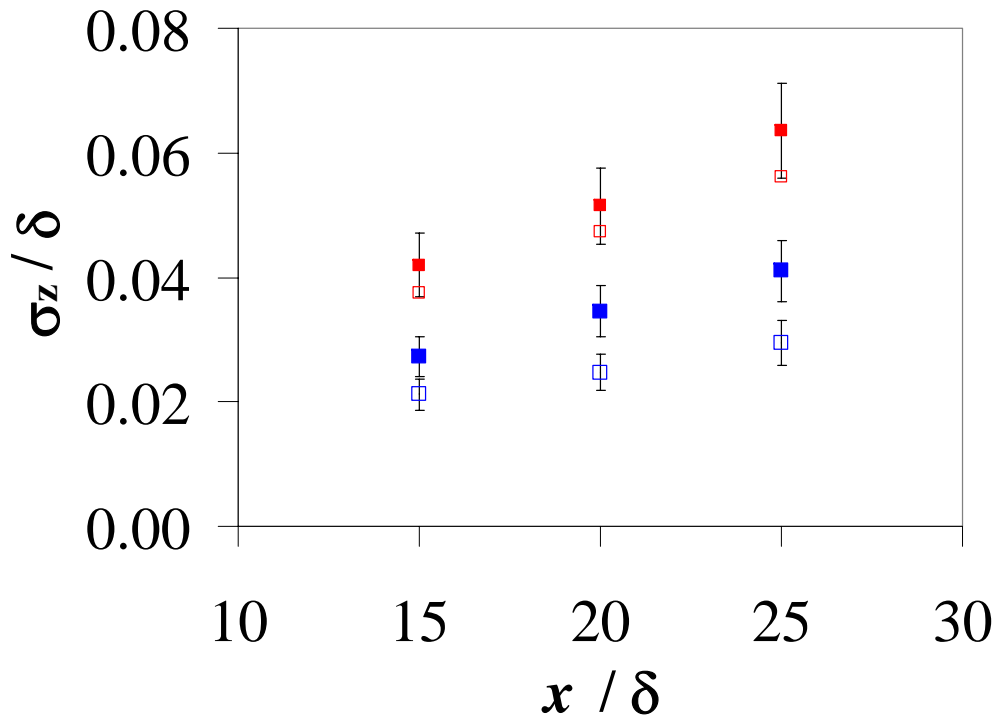


**Standard Design**      ■ - No cutting  
**No Fine Screen**      □ - 1.9% cut

- Surface ripple increases by  $\sim 50\%$  when fine screen removed
- BL cutting reduces  $\sigma_z$  by  $\sim 33\%$  for standard flow conditioner design
- $\sigma_z \downarrow$  as  $\dot{m}_{cut} \uparrow$ ; Cutting as little as 0.6% significantly improves surface smoothness
- **Proper flow conditioning and boundary layer cutting can reduce surface ripple well below the maximum value specified for HYLIFE-II (0.07  $\delta$ )**



# The “Hydrodynamic Source Term”

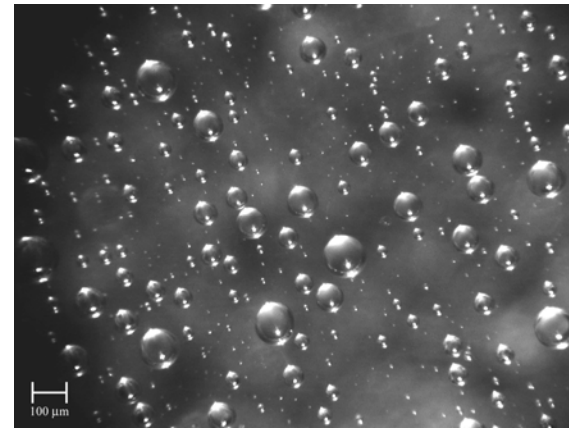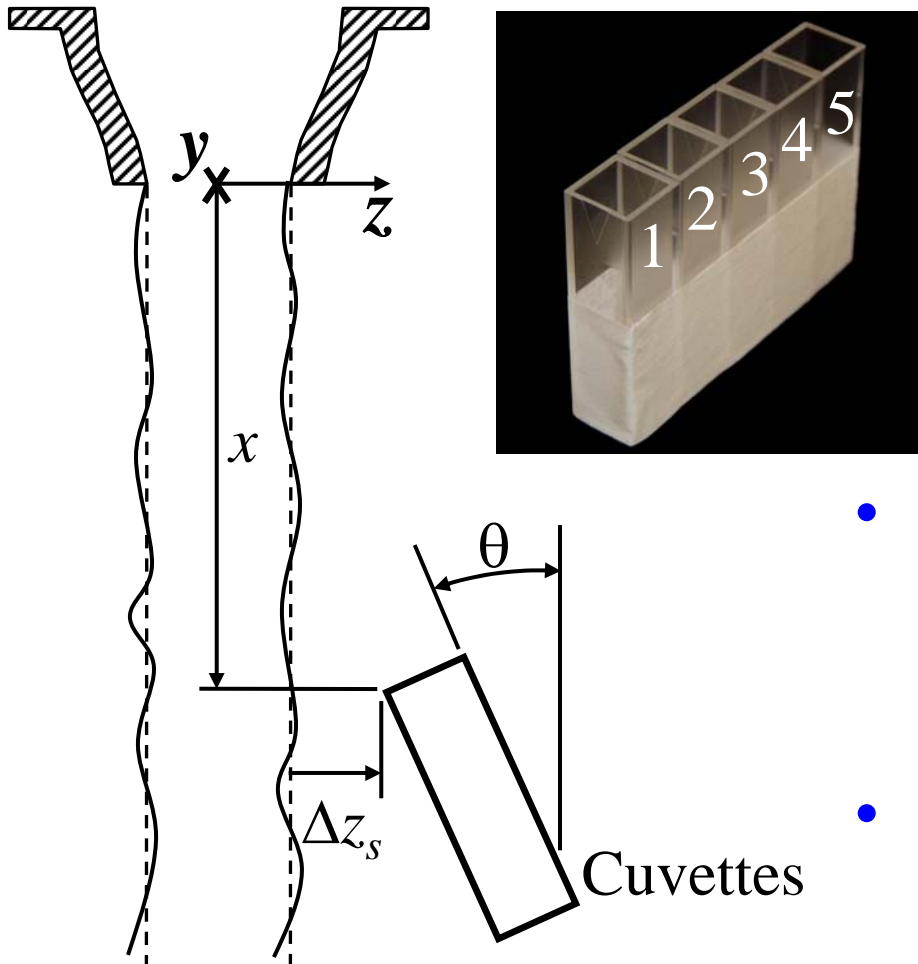


- Used simple mass collection system to measure mass flux of liquid droplets ejected from the free surface at different locations – estimated corresponding chamber number density
- Quantified effects of flow conditioning and boundary layer cutting– compared data vs. empirical primary turbulent breakup model w/o FC & BLC





# Hydrodynamic Source Term - Equivalent Number Density ( $x / \delta = 25$ )

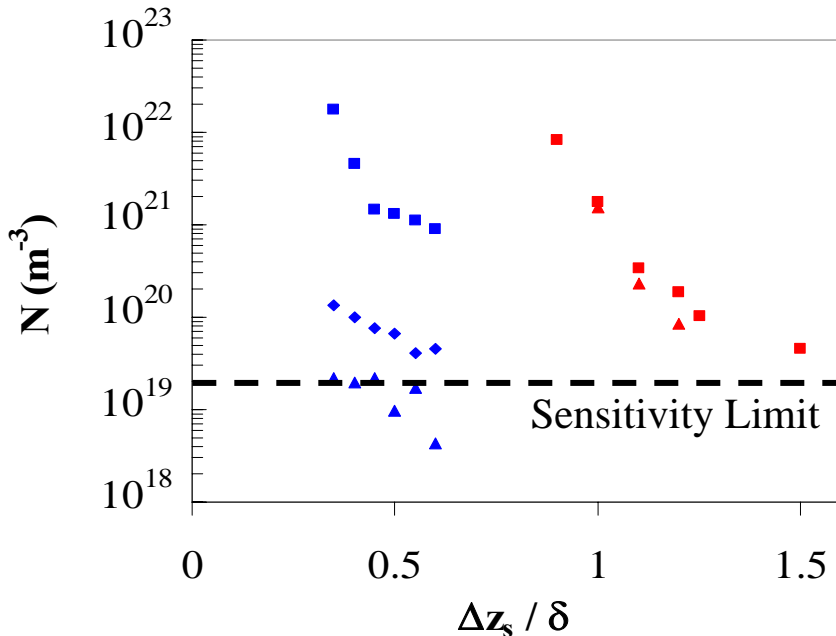


- Droplet mass flux values for jets produced by nozzles with optimized flow conditioners is  $\sim 3-4$  orders of magnitude lower than predictions of empirical correlation
  - Droplets ejected form sparse aerosol around jet
- Removing fine screen increases range and number density of droplets
- **Boundary Layer cutting with modest mass removal rates effectively eliminates turbulent breakup for a well-conditioned jet.**

**Standard Design**  
**No Fine Screen**

$\dot{m}_{cut} / \dot{m}_{flow}$   
 ■ 0.0%    ◆ 1.0%    ▲ 1.9%




# Thin Liquid Protection

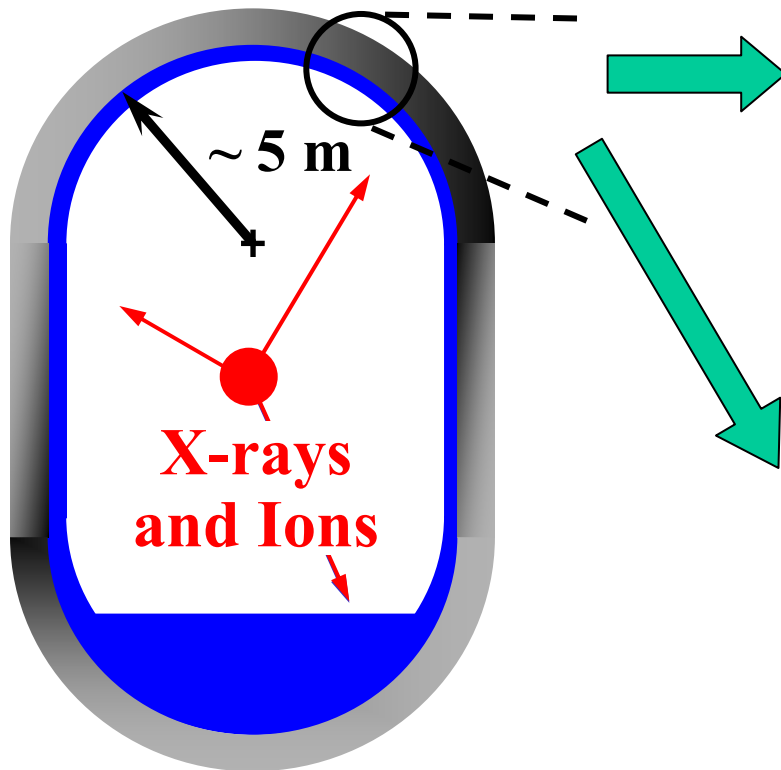


## Wetted Wall

Liquid Injection

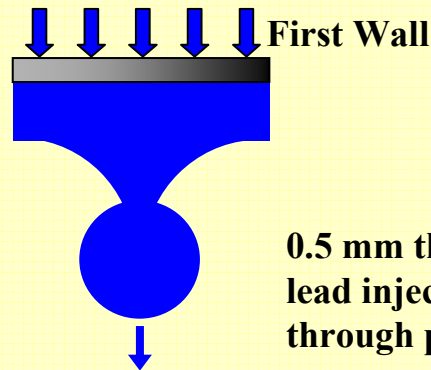

## Forced Film

Injection Point

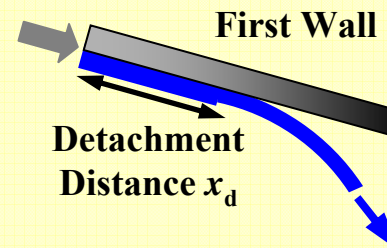

Few mm thick Pb “forced film” injected tangentially at  $>7$  m/s over upper endcap

Forced Film



# Thin Liquid Protection

## Problems Addressed (wetted wall/**Forced Film**):

- How frequently will the film “drip”? How large are the drops?
  - Constraints on the repetition rate to prevent interference with beam propagation and/or target injection
- Can a minimum film thickness be maintained to provide adequate protection over subsequent target explosions?
  - Constraints on minimum injection velocity
- **How far will the film remain attached to the wall?**
  - Constraints on “tile” size, i.e. spacing between injection and removal ports
- **How much “fog” will be formed around the forced liquid film?**
- **How will the film behave around beam ports/penetrations?**
  - Recommendations on beam port geometry/design.

**Study both wetted wall & forced film concepts over “worst case” of downward-facing surfaces**



# Experimental & Numerical Study of Porous Wetted Walls


## Quantify effects of

- injection velocity  $w_{in}$ , initial film thickness  $z_o$ , initial perturbation geometry & mode number, inclination angle  $\theta$ , and Evaporation & Condensation at the interface


## on

- Droplet detachment time, Droplet size, and minimum film thickness prior to detachment

**Obtained generalized charts for dependent variables as functions of the governing non-dimensional parameters**

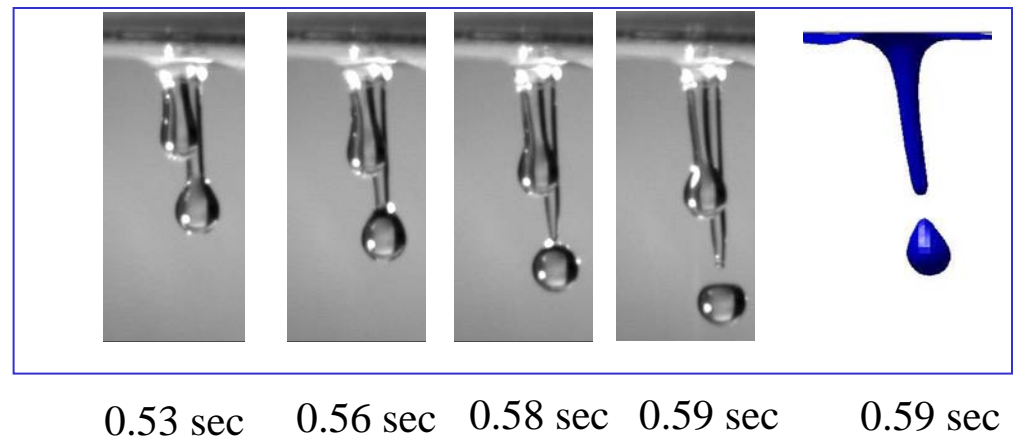

# Typical Non-Dimensional Charts – Porous Wetted Walls

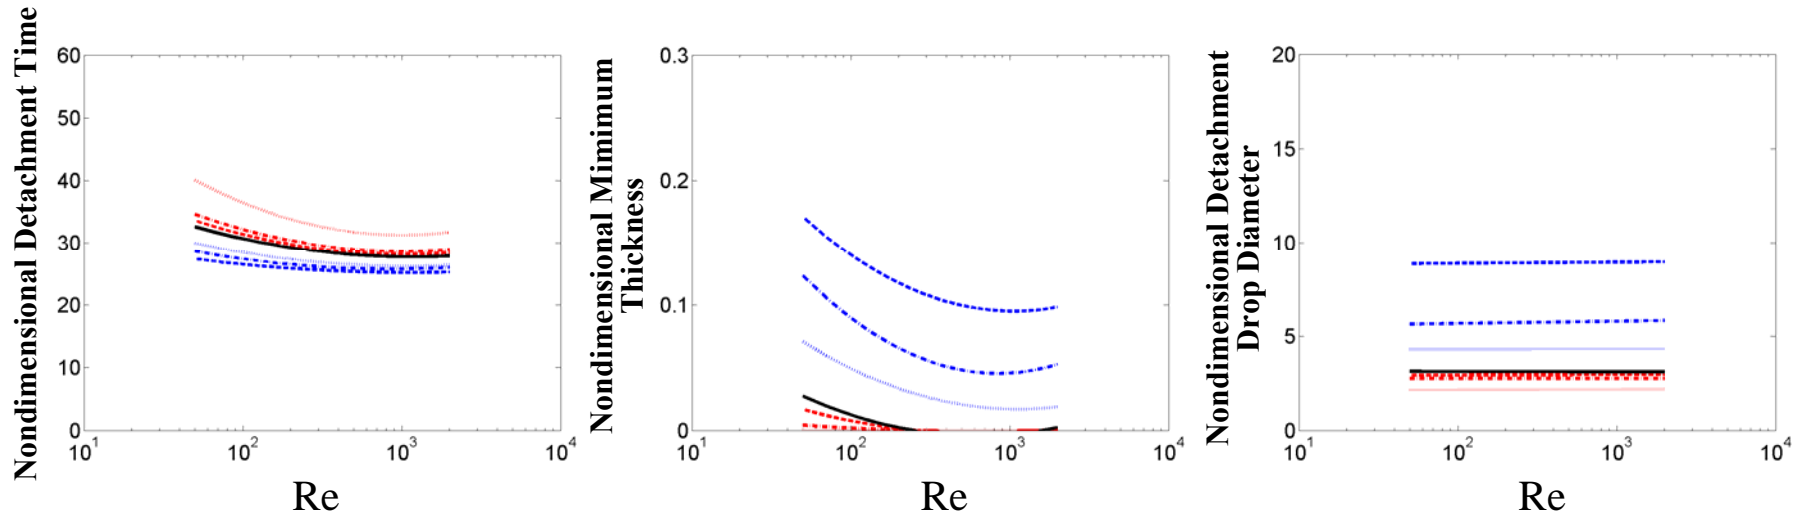

- Nondimensional Initial Thickness  $z_o^* = 0.1$
- Nondimensional Injection Velocity  $w_{in}^* = 0.01$

Nondimensional mass flux

$$\dot{m}_f^* = \dot{m}_f / (\rho_L U_o)$$

|         |                        |         |                       |
|---------|------------------------|---------|-----------------------|
| .....   | $\dot{m}_f^* = -0.005$ | .....   | $\dot{m}_f^* = 0.005$ |
| - . - . | $= -0.002$             | - . - . | $= 0.01$              |
| - - - - | $= -0.001$             | - - - - | $= 0.02$              |
| ————    | $= 0$                  |         |                       |



# Wetted Wall Summary

- Developed generalized non-dimensional charts applicable to a wide variety of candidate coolants and operating conditions
- Stability of liquid film imposes
  - Lower bound on repetition rate (or upper bound on time between shots) to avoid liquid dripping into reactor cavity between shots
  - Lower bound on liquid injection velocity to maintain minimum film thickness over entire reactor cavity required to provide adequate protection over subsequent fusion events
- Model Predictions are closely matched by Experimental Data





# Experimental Study of Forced Liquid Films

## Quantify Effects of

- Film thickness, injection velocity, surface inclination, surface curvature, injection angle, and surface material wettability

## On


- Detachment distance, film width and thickness, and ejected droplet mass flux

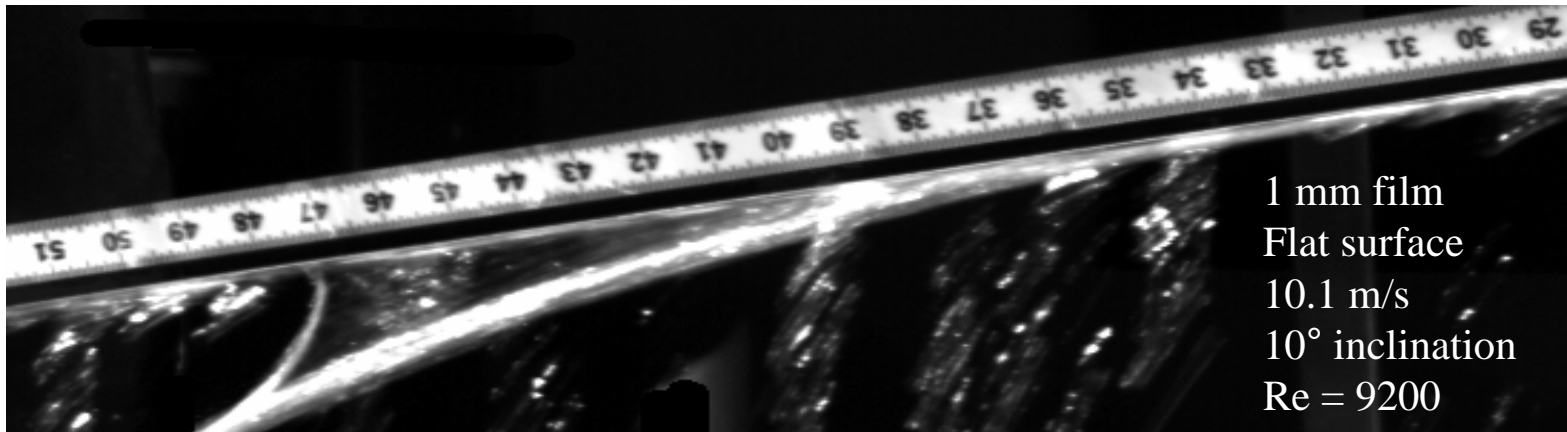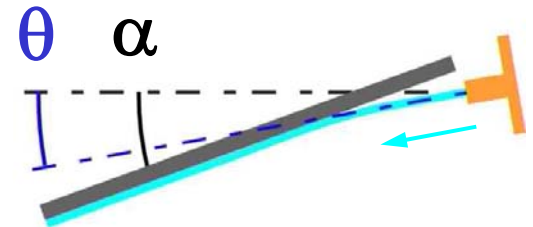

1 mm film  
Flat surface  
10.1 m/s  
10° inclination  
 $Re = 9200$



# Detachment Distance Vs. Weber Number

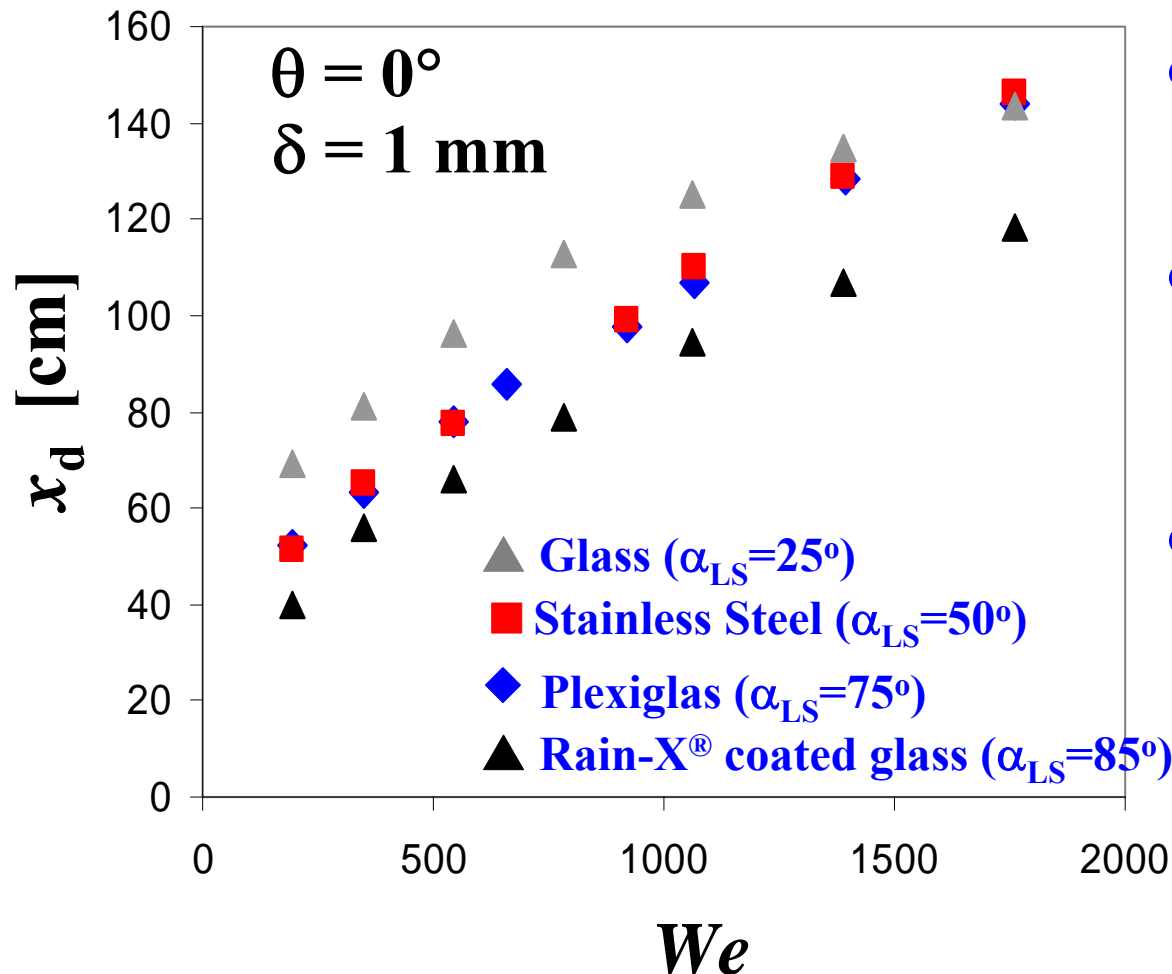




- Similar data for other angles, film thickness, and surface curvature
- Design Windows for stream-wise spacing of injection/removal slots to maintain attached film
- Wetting wall surface requires fewer injection slots (more desirable)





# Penetrations and Beam Ports

- Cylindrical and hydrodynamically-tailored obstructions modeling protective dams around penetrations and beam ports result in film “breakup.”
- Penetrations will pose significant design challenge for forced film wall protection systems.

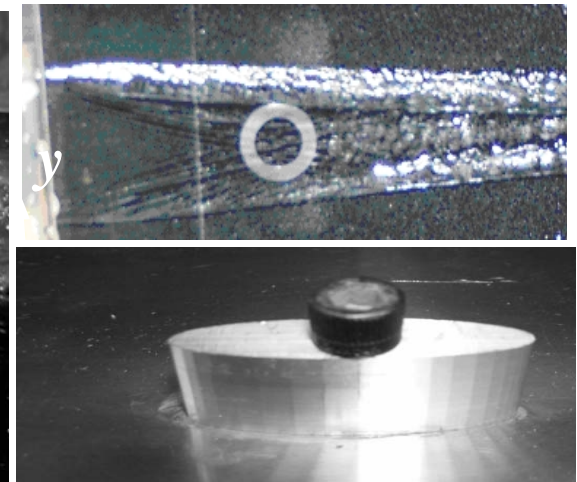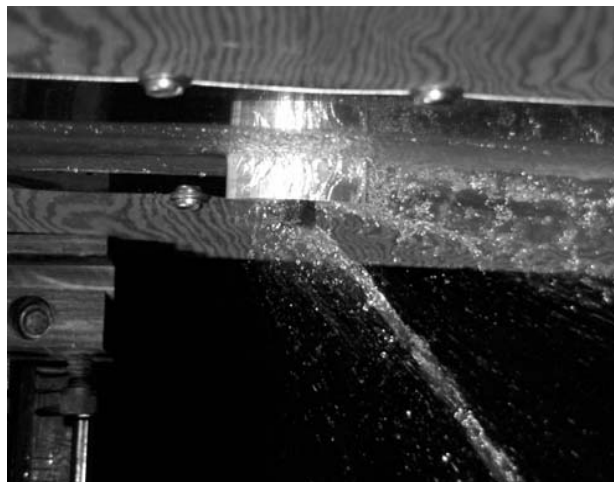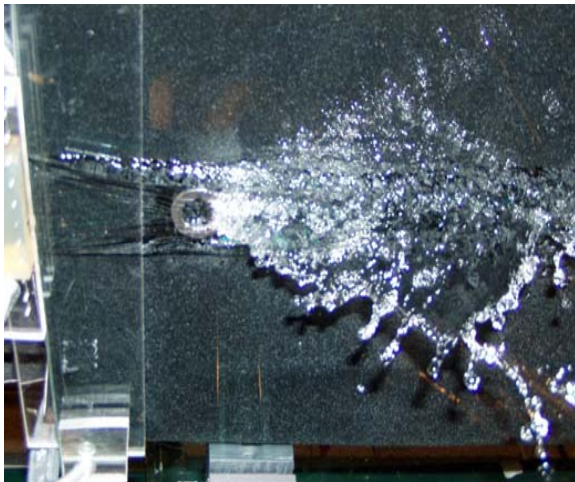



# Liquid-Film-Protected Divertors

## Problem Definition:

- **ALPS and APEX Programs established temperature limits for different liquids to limit plasma contamination by evaporation**
- **This work establishes limits for the maximum spatial temperature gradients (i.e. heat flux gradients)**
  - ❑ Spatial Variations in the wall and Liquid Surface Temperatures are expected due to variations in the wall loading
  - ❑ Thermocapillary forces created by such temperature gradients can lead to film rupture and dry spot formation in regions of elevated local temperatures
  - ❑ Initial Attention focused on Plasma Facing Components protected by a “non-flowing” thin liquid film (e.g. porous wetted wall)



# Numerical Simulation - Film Rupture

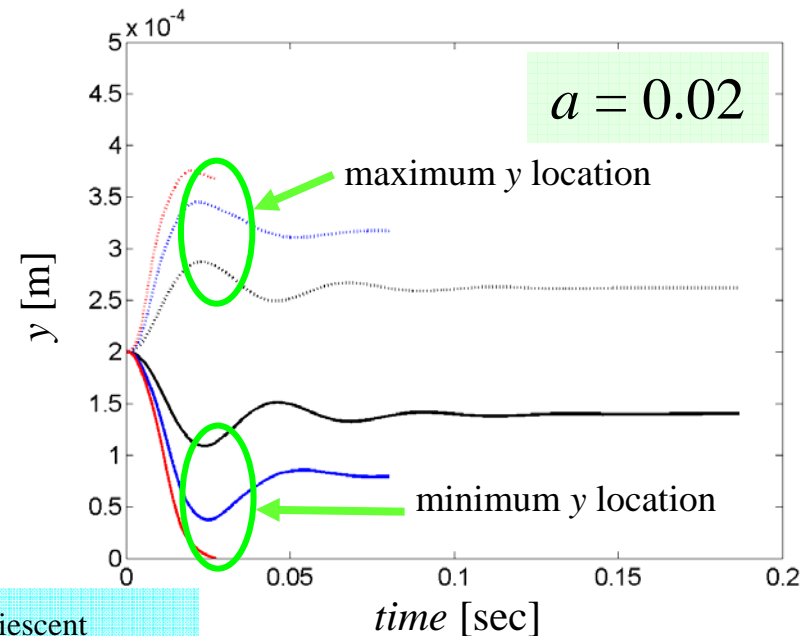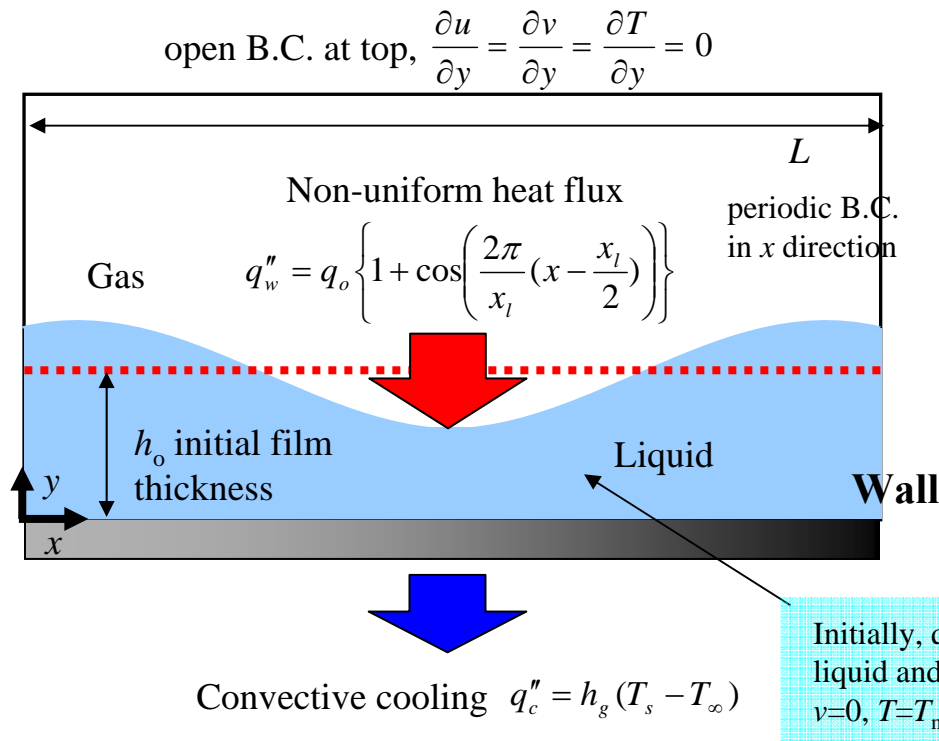

- Asymptotic solution for low aspect ratio with variable surface temperature or heat flux
- Film surface evolution also determined by Level Contour Reconstruction Method
- Generalized Charts for maximum allowable surface temperature (or heat flux) gradients



# Maximum Heat Flux Gradients

*Typical Results for  $h_o=1$  mm &  $a(Nu)=1.0$*

| Coolant             | Mean Temperature [K] | Maximum Allowable Heat Flux Gradient : $(Q''/L)_{\max}$ [(MW/m <sup>2</sup> )/cm] |                      |                      |                      |                      |
|---------------------|----------------------|---|----------------------|----------------------|----------------------|----------------------|
|                     |                      | $a = 0.05$  | $a = 0.02$           | $a = 0.01$           | $a = 0.005$          | $a = 0.002$          |
| <b>Lithium</b>      | 573                  | $1.9 \times 10^0$   | $6.3 \times 10^{-1}$ | $3.1 \times 10^{-1}$ | $1.5 \times 10^{-1}$ | $6.1 \times 10^{-2}$ |
| <b>Lithium-Lead</b> | 673                  | $1.2 \times 10^1$   | $4.9 \times 10^0$    | $2.4 \times 10^0$    | $1.2 \times 10^0$    | $4.9 \times 10^{-1}$ |
| <b>Flibe</b>        | 673                  | $1.7 \times 10^{-1}$  | $6.5 \times 10^{-2}$ | $3.2 \times 10^{-2}$ | $1.6 \times 10^{-2}$ | $6.4 \times 10^{-3}$ |
| <b>Tin</b>          | 1273                 | $1.7 \times 10^1$   | $6.8 \times 10^0$    | $3.4 \times 10^0$    | $1.7 \times 10^0$    | $6.8 \times 10^{-1}$ |
| <b>Ga</b>           | 1073                 | $5.0 \times 10^1$   | $1.9 \times 10^1$    | $9.7 \times 10^0$    | $4.8 \times 10^0$    | $1.9 \times 10^0$    |



# CONCLUSIONS

## Experimental & Numerical Studies:

- Provide fundamental understanding of “building block” type flows in liquid-protected systems
- Develop experimentally-validated numerical tools (codes/models) to analyze behavior of such flows
- Produce generalized charts and design guidelines to identify windows for successful operation of liquid wall protection systems



# Acknowledgements

## DOE, ARIES, and Georgia Tech

- **Research Faculty** : D. Sadowski and S. Shin
- **Students** : F. Abdelall, J. Anderson, J. Collins, S. Durbin, L. Elwell, T. Koehler, J. Reperant and B. Shellabarger, V. Novak, C. Dillon, D. Lascar

### **Additional Information -- See TOFE-16 Presentations:**

1. P-11-33: S. Shin, et al., *Design Constraints for Liquid-Protected Divertors*
2. P-11-41: S. Durbin, et al., *Flow Conditioning Design in Thick Liquid Protection*
3. P-11-40: S. Durbin, et al., *Impact of Boundary Layer Cutting on Free Surface Behavior in Turbulent Liquid Sheets*
4. P-11-43: V. Novak, et al., *Experimental and Numerical Investigation of Mist Cooling for the Electra Hibachi*

